




Concrete,  
Stone, Sandstone  
& Hollow Brickwork



# Hammer-In Fixing

## Typical Applications:

- Fixing stud battens to walls before cladding.
- Fixing long runs of shelf supports.
- Fixing skirting boards to walls.

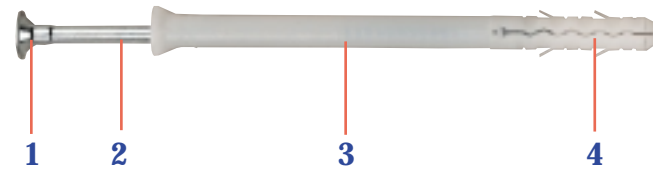

● For fast, repetitive fixing with minimal screwdriver work.


1. Reinforced screwhead - facilitates high knock-in loads with the added benefit of plug neck grip.  
2. Hammer in drive screw for fast installation.

3. Deforming crumple zone allows quick adjustment in uneven surfaces.  
4. Extended expansion zone gives extra grip.


## Product Specification

| DESC.     | HOLE DIA. (mm) | MAX. FIXTURE THICKNESS (mm) | FIXINGS PER PACK |       |     | BOX PRODUCT CODE |
|-----------|----------------|-----------------------------|------------------|-------|-----|------------------|
|           |                |                             | RETAIL           | TRADE | BOX |                  |
| 5 x 30mm  | 5              | 5                           | -                | -     | 100 | 21-510           |
| 5 x 40mm  | 5              | 15                          | -                | -     | 100 | 21-511           |
| 5 x 50mm  | 5              | 25                          | 10               | -     | 100 | 21-512           |
| 6 x 35mm  | 6              | 10                          | -                | -     | 100 | 21-518           |
| 6 x 50mm  | 6              | 25                          | -                | -     | 100 | 21-517           |
| 6 x 60mm  | 6              | 35                          | 10               | 20    | 100 | 21-520           |
| 6 x 70mm  | 6              | 45                          | -                | 20    | 100 | 21-522           |
| 8 x 60mm  | 8              | 25                          | -                | -     | 100 | 21-528           |
| 8 x 80mm  | 8              | 45                          | 10               | 20    | 100 | 21-530           |
| 8 x 100mm | 8              | 60                          | 10               | 20    | 100 | 21-532           |
| 8 x 120mm | 8              | 80                          | 10               | 20    | 100 | 21-534           |
| 8 x 140mm | 8              | 100                         | -                | -     | 100 | 21-536           |


### Installation



1. Place fixture in position. Drill hole of appropriate diameter through fixture into base material. Total depth (including fixture) should equal length of plug plus 5mm. Clean out hole.




2. Insert plug into hole, lightly tap flush to the fixture



3. For extra security, tighten an extra half turn with a screwdriver. To remove the fixture, undo the screw first.




Hollow, Solid  
& Combination Walls



# Rawl-in-One™ MULTI-PURPOSE PLUG

- The all-purpose plug for hollow, solid and combination walls.
- Accepts a variety of screw sizes.

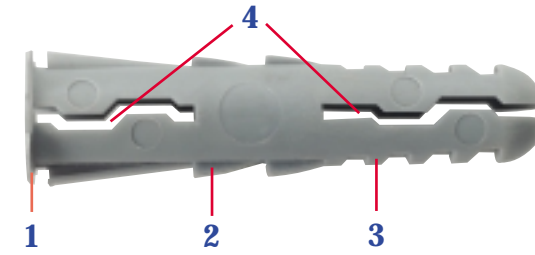

1. Flange ensures flush fit to surface. Can be collapsed for deep setting in solid materials.  
2. Anti-rotation fins prevent spinning when tightening screw.

3. Engineered grip feature for extra holding power.  
4. Twin expansion points for a strong fix in hollow, solid or combination materials.

## Typical Applications:


- Perfect for household fixtures, cupboards, small shelves, hooks etc.
- Hollow walls – plasterboard, plywood, chipboard etc. Sizes 5 & 6mm only.
- Solid walls – brickwork, blockwork, concrete etc. All plug sizes.
- Combination walls – dry lined walls etc. All plug sizes.

## Product Specification


| DESC.      | SCREW SIZE (mm)     | HOLE DIA. (Solid Substrates) (mm) | HOLE DIA. (Hollow & Combination Walls) (mm) | FIXINGS PER PACK  |       |
|------------|---------------------|-----------------------------------|---|-------------------|-------|
|            |                     |                                   |   | RETAIL            | TRADE |
| 5 x 25mm   | 3-5mm (No.4-10)     | 5                                 | 4.5   | 12*, 32           | -     |
| 6 x 30mm   | 3.5-5.5mm (No.6-12) | 6                                 | 5.5   | 10*, 30           | 100   |
| 8 x 40mm   | 4.5-6mm (No.8-14)   | 8                                 | 7   | 8*, 20            | 100   |
| 10 x 50mm  | 5-8mm (No.10-18)    | 10                                | 9   | 6*, 10            | 50    |
| Mixed Clip | 3-8mm (No.4-18)     | -                                 | -   | 48 (5,6,8 & 10mm) | -     |

\* These packs contain screws.


### Installation (Solid walls)



1. Mark out and drill holes.




2. Clean out holes and insert Rawl-in-One™. Tap home.





3. Position fixture, insert screw. Tighten until fixture is secure.

### Installation (Hollow walls)



Follow instructions as above.



### Combination Walls

